

# UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No. 1081.1071/JDH

First Named Inventor or Application Identifier:

Yoshiyuki OKADA

Express Mail Label No.

(Only for new nonprovisional applications under 37 CFR 1.53(b))

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☒ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract ..... [ Total Pages: 24 ]
3. ☒ Drawing(s) (35 USC 113) ..... [ Total Sheets: 15 ]
4. ☒ Oath or Declaration ..... [ Total Pages: 3 ]
  - a. ☒ Newly executed (original or copy)
  - b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
    - i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (usable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
  - a. ☐ Computer Readable Copy
  - b. ☐ Paper Copy (identical to computer copy)
  - c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application, status still proper and desired.
15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Other:

## 17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \_\_\_\_/\_\_\_\_

## 18. CORRESPONDENCE ADDRESS

STAAS & HALSEY  
Attn: James D. Halsey, Jr.  
700 Eleventh Street, N.W., Suite 500  
Washington, DC 20001Telephone: (202) 434-1500  
Facsimile: (202) 434-1501jc408 U.S. PTO  
06/22/98jc523 U.S. PTO  
09/102149  
06/22/98

<b>NEW APPLICATION FEE TRANSMITTAL</b>		Attorney Docket No.		1081.1071/JDH			
		Application Number		UNASSIGNED			
		Filing Date		June 22, 1998			
AMOUNT ENCLOSED		\$ 830.00		First Named Inventor		Yoshiyuki OKADA	

FEE CALCULATION (fees effective 10/01/97)					
CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS	9 - 20 =	0	X \$ 22.00 =	\$ 0.00
	INDEPENDENT CLAIMS	1 - 3 =	0	X \$ 82.00 =	0.00
	MULTIPLE DEPENDENT CLAIMS (any number; if applicable)			+ \$270.00 =	0.00
				<b>BASIC FILING FEE</b>	+ 790.00
				Total of above Calculations =	\$ 790.00
	Surcharge for late filing fee, Statement or Power of Attorney (\$130.00)				+ 0.00
	Reduction by 50% for filing by small entity (37 CFR 1.9, 1.27 & 1.28).				- 0.00
				<b>TOTAL FILING FEE =</b>	\$ 790.00
	Surcharge for filing non-English language application (\$130.00; 37 CFR 1.52(d))				+ 0.00
	Recordation of Assignment (\$40 00; 37 CFR 1.21(h)(1))				+ 40.00
				<b>TOTAL FEES DUE =</b>	\$ 830.00


  

METHOD OF PAYMENT	
<input checked="" type="checkbox"/> Check enclosed as payment. <input type="checkbox"/> Charge "TOTAL FEES DUE" to the Deposit Account No., below. <input type="checkbox"/> No payment is enclosed and no charges to the Deposit Account are authorized at this time.	

GENERAL AUTHORIZATION	
<input checked="" type="checkbox"/> If the above-noted "AMOUNT ENCLOSED" is not correct, the Commissioner is hereby authorized to credit any overpayment or charge any additional fees necessary to: <div style="margin-left: 40px;">           Deposit Account No. <span style="border: 1px solid black; padding: 2px 20px;">19-3935</span>            Deposit Account Name <span style="border: 1px solid black; padding: 2px 20px;">STAAS &amp; HALSEY</span> </div>	
<input checked="" type="checkbox"/> The Commissioner is also authorized to credit any overpayments or charge any additional fees required under 37 CFR 1.16 (filing fees) or 37 CFR 1.17 (processing fees) during the prosecution of this application, including any related application(s) claiming benefit hereof pursuant to 35 USC § 120 (e.g., continuations/divisionals/CIPs under 37 CFR 1.53(b) and/or continuations/divisionals/CPAs under 37 CFR 1.53(b)) to maintain pendency hereof or of any such related application.	

SUBMITTED BY: STAAS & HALSEY			
Typed Name	James D. Halsey, Jr.	Reg. No.	22,729
Signature		Date	June 22, 1998

# BROADCAST VIDEO IMAGE RECORDING APPARATUS

## BACKGROUND OF THE INVENTION

### Field of the Invention:

5           The present invention relates to a broadcast video image recording apparatus for recording television video image data to be broadcast in a recording unit.

### Description of the Related Art:

10           Attempts are being made to digitize television video images in view of recent tendencies to combine television and computer technologies and employ much more channels in digital broadcasting services than analog broadcasting services. It is possible to transmit 4 to 8 channels in digital broadcasting services using the bandwidth of one analog  
15           broadcasting channel. Such digital television video image transmission results in a reduction in the cost and an increase in the image quality. In addition, it is possible to obtain digital video image information from various information sources including satellite broadcasting services, ground  
20           wave broadcasting services, cable television broadcasting services, the Internet, etc. As a result, systems for recording video images are required to have diversified functions in order to record digital video image information from those various information sources.

25           FIG. 15 of the accompanying drawings shows an operation sequence of a conventional system for recording digital video images.

There has been proposed a system, combined with broadcasting station services, for recording digital video images. For example, the Science & Technical Research Laboratories of NHK (NIHON HOSO KYOKAI) have proposed ISTV (Integrated Services TV) based on the home server technology. The ISTV allows a TV receiver to automatically select and record various items of information indicated by the user, including news, weather forecasts, programs, program guides, etc. that are delivered from broadcasting stations. The recorded video images can be viewed anytime whenever the user wants.

The ISTV services offer various functions as described below. The first function automatically receives news, television newspapers, programs, etc. altogether for the user to see at any desired times.

The second function automatically updates news, weather forecasts, etc. that are broadcast at certain times at certain intervals.

According to the third function, if a genre, a theme, or a character which is of interest to the user is designated in advance, then programs and other broadcast information are automatically filtered on the basis of index data attached thereto, and selectively stored.

The operation sequence of the conventional system for recording digital video images will be described below with reference to FIG. 15. Numerals each with a prefix S represent step numbers.

(S1) First, the user manually indicates a program to be recorded.

(S2) Broadcast video images are inputted.

(S3) The program to be recorded is selected from  
5 the inputted broadcast video images based on the indicated details entered in step S1. If the program is to be recorded, then control proceeds to step S4. If the program is not to be recorded, then control goes back to step S2.

(S4) The indicated program is recorded.

10 (S5) The user indicates whether the recorded program is to be played back or not. If not to be played back, then control goes back to step S2.

(S6) The recorded program is played back. The user can now view the recorded program.

15 The conventional system is capable of recording programs that have been indicated.

However, the conventional system is unable to record any programs that have been broadcast in the past. For example, when a program has already started to be broadcast  
20 beyond the proper timing to record the program, or when the user wants to view a program once again after viewing the program as it is broadcast, the conventional system cannot record those programs.

#### SUMMARY OF THE INVENTION

25 It is an object of the present invention to provide a broadcast video image recording apparatus capable of record-

ing video images broadcast before the user indicates video images for recording.

Another object of the present invention to provide a broadcast video image recording apparatus capable of recording  
5 ing video images that have been broadcast in the past.

To achieve the above objects, a broadcast video image recording apparatus for recording broadcast video image data has a first storage unit for storing broadcast video image data, a second storage unit for storing video image data  
10 to be played back, and a control unit for searching the first storage unit for video image data which has been indicated, and storing the indicated video image data in the second storage unit.

Broadcast video images are stored in the first  
15 storage unit at all times, and video images stored in the first storage unit are read and stored in the second storage unit at a time indicated for recording. Therefore, video images that have been broadcast in the past can be recorded.

Even if a recording time gets behind schedule, desired broadcast video images which have been stored in the  
20 first storage unit can be transferred from the first storage unit to the second storage unit at the delayed time. Therefore, the desired broadcast video images can be recorded in the second storage unit.

25 Other features and advantages of the present invention will become readily apparent from the following description taken in conjunction with the accompanying drawings.

## BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate presently preferred embodiments of the invention, and together  
5 with the general description given above and the detailed description of the preferred embodiments given below, serve to explain the principle of the invention, in which:

FIG. 1 is a block diagram showing the principles of the present invention;

10 FIG. 2 is a block diagram of a broadcast video image recording apparatus according to an embodiment of the present invention;

FIG. 3 is a flowchart of a primary storing process of a control unit of the broadcast video image recording apparatus shown in FIG. 2;  
15

FIG. 4 is a flowchart of a secondary storing process of the control unit of the broadcast video image recording apparatus shown in FIG. 2;

FIG. 5 is a diagram of management tables of the broadcast video image recording apparatus shown in FIG. 2;  
20

FIG. 6 is a diagram illustrative of a recording operation of the broadcast video image recording apparatus shown in FIG. 2;

FIG. 7 is a diagram illustrative of another recording operation of the broadcast video image recording apparatus shown in FIG. 2;  
25

FIG. 8 is a flowchart of an automatic indicating process of the control unit of the broadcast video image recording apparatus shown in FIG. 2;

FIG. 9 is a flowchart of a list updating sequence  
5 in the automatic indicating process shown in FIG. 8;

FIG. 10 is a diagram illustrative of a first list updating process of the list processing sequence shown in FIG. 9;

FIG. 11 is a diagram illustrative of a second list updating process of the list processing sequence shown in FIG. 9;

FIG. 12 is a diagram illustrative of a third list updating process of the list processing sequence shown in FIG. 9;

FIG. 13 is a diagram showing the list updating processes;

FIG. 14 is a block diagram of a broadcast video image recording apparatus according to another embodiment of the present invention; and

FIG. 15 is a flowchart of an operation sequence of a conventional system for recording digital video images.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1 shows in block form the principles of the present invention.

As shown in FIG. 1, a receiver unit 1 receives video images that have been broadcast. A primary storage unit 2 stores all the video images that have been received by the



receiver unit 1. A secondary storage unit 3 stores those video images which have been indicated, of all the video images that have been stored in the primary storage unit 2. The user manually operates a request unit 4 to indicate video images. The request unit 4 has a playback button and numerical keys for indicating a channel and a time.

A control unit 5 controls the primary storage unit 2 to store all the video images that have been received by the receiver unit 1. The control unit 5 also controls the secondary storage unit 3 to store those video images that are indicated by the user through the request unit 4. The control unit 5 further plays back the video images stored in the secondary storage unit 3 based on a playback instruction from the request unit 4.

FIG. 2 shows in block form a broadcast video image recording apparatus according to an embodiment of the present invention.

As shown in FIG. 2, the broadcast video image recording apparatus has a primary storage unit (memory) 2 comprising a hard disk unit and a secondary primary storage unit (memory) 3 comprising an optical disk unit.

The broadcast video image recording apparatus also has a control unit 5 comprising a processor. The control unit 5 includes a whole controller 10 for controlling a primary storage address controller 12 and a secondary storage address controller 13 to execute a primary storing process, a secon-

dary storing process, and a playback process. The control unit 5 also includes a timer 11 for measuring time.

The primary storage address controller 12 serves to control recording addresses/playback addresses of the primary storage unit 2. The secondary storage address controller 13 serves to control recording addresses/playback addresses of the secondary storage unit 3.

The broadcast video image recording apparatus also has a primary storage management table 14 for storing recording addresses and times of the primary storage unit 2, and a secondary storage management table 15 for storing recording addresses and times of the secondary storage unit 3.

The control unit 5 further includes a view/playback history unit 16 for holding a history of view requests/playback requests from a request unit 4, and an automatic recording indicator 17 for automatically indicating recording sessions based on the history held by the view/playback history unit 16.

The whole controller 10, the timer 11, the primary storage address controller 12, the secondary storage address controller 13, the view/playback history unit 16, and the automatic recording indicator 17 are actually functions that are performed by the control unit 5.

The whole controller 10 uses the timer 11, the primary storage address controller 12, and the primary storage management table 14 to store video image data that are received all the times in the primary storage unit 2. Irrespec-

tive of whether there is a request from the user or not, the whole controller 10 increments recording addresses of the primary storage unit 2 in synchronism with the timer 11 to store video image data in the primary storage unit 2 according to an

5 FIFO (First-In-First-Out) sequence. Such a primary storing process will be described below with reference to FIG. 3.

Numerals each with a prefix S represent step numbers.

(S11) The recording (write) address "nw" in the primary storage unit 2 is initialized to "0", and a time "t" is initialized to a time "t'" of the timer 11.

(S12) Video image data for every minute is recorded at the corresponding write address "nw" in the primary storage unit 2. According to MPEG2, video image data for one minute has a size of about 60 Mbytes.

15 (S13) In order to manage the recorded video image data, the time "t" and the write address "nw" for the recorded video image data are stored in the primary storage management table 14 as shown in FIG. 5.

(S14) The time "t" is incremented and the write address "nw" is incremented in synchronism with the timer 11.

(S15) Since the primary storage unit 2 stores video image data according to the FIFO sequence, it is decided whether the write address "nw" has exceeded the maximum address "N" of the primary storage unit 2 or not. If the write address "nw" has not exceeded the maximum address "N", then control returns to step S12.

(S16) If the write address "nw" has exceeded the maximum address "N", then the write address "nw" is reset to "0", and control returns to step S12.

In this manner, video image data that has been  
5 broadcast is recorded at all times in the primary storage unit 2 according to the FIFO sequence.

Then, the video image data recorded in the primary storage unit 2 is selectively read into the secondary storage unit 3 in response to a recording request. The whole controller 10 uses the timer 11, the primary storage address controller 12, the primary storage management table 14, the secondary storage address controller 13, and the secondary storage management table 15 to store the video image data that has been stored in the primary storage unit 2. Such a secondary storing process will be described below with reference to FIG. 4.  
10  
15 Numerals each with a prefix S represent step numbers.

(S21) The playback (read) address "nw" in the primary storage unit 2 is set to "nr", and the recording (write) address "nw'" in the secondary storage unit 3 is set to "0".

20 (S22) The whole controller 10 decides whether there is a secondary recording request from the request unit 4.

(S23) For recording video image data in the secondary storage unit 3, the user indicates a start time "ts" and an end time "te" for desired video image data recorded in the primary storage unit 2, from the request unit 4. The start  
25 time "ts" and the end time "te" are held in the secondary storage management table 15.

(S24) In order to check if the desired video image data has been recorded in the primary storage unit 2, it is decided whether the start time "ts" and the recording (write) address "nw" corresponding thereto are stored in the primary storage management table 14 or not. If the start time "ts" and the recording (write) address "nw" are not stored in the primary storage management table 14, then it is judged that the desired video image data has not been recorded, and control goes to step S25. If the start time "ts" and the recording (write) address "nw" are stored in the primary storage management table 14, then it is judged that the desired video image data has been recorded, and control goes to step S26.

(S25) Control waits for one minute, and then returns to step S24.

(S26) The playback (read) address "nr" in the primary storage unit 2 is set to the recording (write) address "nw" held in the primary storage management table 14.

(S27) As shown in FIG. 5, in order to record the video image data for one minute from the primary storage unit 2 into the secondary storage unit 3, the data at the playback (read) address "nr" in the primary storage unit 2 is recorded at the recording (write) address "nw'" in the secondary storage unit 3.

(S28) As shown in FIG. 5, the time "ts", the recording (write) address "nw'" in the secondary storage unit 3, and information indicative of whether there is recorded data or not are held in the secondary storage management table 15.

(S29) The time "ts", the playback (read) address "nr", and the recording (write) address "nw'" are incremented each by "+ 1" in synchronism with the timer 11.

(S30) It is decided whether the recording (write) address "nw'" has exceeded the maximum address "N'" of the secondary storage unit 3 or not. If the recording (write) address "nw'" has exceeded the maximum address "N'" of the secondary storage unit 3, then control returns to step S31. If the recording (write) address "nw'" has not exceeded the maximum address "N'" of the secondary storage unit 3, then control proceeds to step S32.

(S31) The recording (write) address "nw'" is reset to "0".

(S32) It is decided whether the time "ts" has exceeded the end time "te" or not. If the time "ts" has exceeded the end time "te", then the requested recording is over, and control goes back to step S22. If the time "ts" has not exceeded the end time "te", then since requested recording is not over, control returns to step S24.

In this manner, the video image data or program having the start and end times that have been indicated by the user is transferred from the primary storage unit 2 to the secondary storage unit 3.

FIGS. 5 and 6 illustrate the manner in which video image data is played back from the primary storage unit 2 and recorded into the secondary storage unit 3. In the primary storage unit 2, the addresses are cyclically incremented to

store video image data according to the FIFO sequence. While video image data is being recorded into the primary storage unit 2, previously recorded video image data is played back from the primary storage unit 2. Video image data for every 5 minute is played back from the primary storage unit 2 and recorded into the secondary storage unit 3 after the video image data has started to be played back until its playback is ended.

Each of the primary storage management table 14 and 10 the secondary storage management table 15 is capable of holding data for 2 hours. It is assumed that the present time is "9 : 16" and broadcast video image data is overwriting the video image data recorded at "7 : 16" two hours ago in the primary storage unit 2. FIG. 5 shows that there are a primary 15 storage playback request and a secondary storage recording request for the video image data for 14 minutes of "9 : 01 - 9 : 14".

The secondary storage management table 15 holds times, secondary storage unit addresses, and information indicative of whether there is recorded data or not. The information indicative of whether there is recorded data or not is 20 used to decide whether the data should be overwritten or not. As shown in FIG. 5, a recording table 15-1 holds recording titles, times, and ranges of recording addresses in the secondary storage unit 3. The recording table 15-1 is used to recognize 25 remaining data not recorded.

FIG. 5 shows that the video image data from "9 : 01", 15 minutes back from the present time "9 : 16", is being played back from the primary storage unit 2 and recorded into the secondary storage unit 3. This means that the video image data is recorded from the primary storage unit 2 into the secondary storage unit 3 with a 15-minute time difference. If the video image data played back from the primary storage unit 2 is directly outputted for display, then the user can see video images broadcast 15 minutes ago. This means that even if the user gets a certain time late for a broadcast program, the user is still able to see the program after the time.

The video image data recorded in the secondary storage unit 3 can be played back in response to a playback request from the request unit 4.

FIG. 7 illustrates another recording operation of the broadcast video image recording apparatus shown in FIG. 2. In FIG. 7, the end time for the playback of video image data from the primary storage unit 2 is behind the time at which video image data is being recorded in the primary storage unit 2. The recording operation shown in FIG. 7 differs from the recording operation shown in FIG. 5 with respect to two details. First, in the recording operation shown in FIG. 5, video image data is played back with time from the primary storage unit 2 from the start time to the end time, and recorded into the secondary storage unit 3 with a time difference from the present time. According to the recording operation shown in FIG. 7, on the other hand, video image data al-



ready recorded in the primary storage unit 2 up to the time when video image data is being recorded is altogether played back from the primary storage unit 2 and recorded into the secondary storage unit 3. Therefore, the time required to  
5 record video image data into the secondary storage unit 3 can be reduced.

Secondly, in the recording operation shown in FIG. 5, video image data recorded in the secondary storage unit 3 is a certain time behind video image data recorded in the primary storage unit 2. According to the recording operation shown in FIG. 7, however, video image data is recorded simultaneously into the primary storage unit 2 and the secondary storage unit 3 after the recording of video image data in the primary storage unit 2 until the playback of video image data  
10 from the primary storage unit 2 is over. Consequently, the recording of video image data into the secondary storage unit 3 is finished when the playback of video image data from the primary storage unit 2 is over.  
15

In the operation sequence shown in FIG. 7, steps  
20 S26 - S29 shown in FIG. 4 are executed simultaneously, but not in synchronism with the timer, while video image data is being recorded. After the recording of video image data, steps S26 - S29 are executed in synchronism with the timer insofar as the recording capability of the secondary storage unit 3 is  
25 greater than the recording capability of the primary storage unit 2.

FIG. 8 shows an automatic indicating process of the view/playback history unit 16 and the automatic recording indicator 17 of the broadcast video image recording apparatus shown in FIG. 2.

5           The automatic indicating process of the view/playback history unit 16 and the automatic recording indicator 17 will be described below with reference to FIG. 8. Numerals each with a prefix S represent step numbers.

10           (S41) A view/playback request entered manually by the user is received from the request unit 4.

          (S42) The received view/playback request is registered in a list which will be described later on with reference to FIG. 9. Specifically, an entry in the list is deleted or the list is updated according to the view/playback request.

15           (S43) Entries of higher priority in the list, e.g., five entries of higher priority in the list, are indicated.

          In this manner, a list is generated depending on how the user views and plays back broadcast programs, and entries are continuously deleted from the list or the list is  
20 continuously updated. Based on the list, video images which the user wants to see are automatically indicated for recording.

          The list updating sequence in the automatic indicating process shown in FIG. 8 will be described below with  
25 reference to FIG. 9. Numerals each with a prefix S represent step numbers.

(S51) It is decided whether the view/playback request represents a new registration in the list or not based on how entries are registered in the list. If the view/playback request represents a new registration, then control proceeds step S52. If the view/playback request does not represent a new registration, then control jumps to step S55.

(S52) It is decided whether all registration spaces in the list are full or not. If all registration spaces in the list are full, then control goes to step S53. If the list is not full, then control jumps to step S54.

(S53) Because all registration spaces in the list are full, the entry of lowest priority is deleted from the list.

(S54) An entry is registered in the list according to processes shown in FIGS. 10 through 13.

(S55) The list is updated according to the processes shown in FIGS. 10 through 13.

FIGS. 10 through 12 show three lists by way of example. Each of the lists contains an order, days, channels, start times, end times, program titles, character names, and genres.

In FIG. 10, a list updating process called MTF (Move To Front) is employed. As also shown in FIG. 13, a newly registered program is put in a location of highest priority in the list. When a program is updated, it is also moved to the location of highest priority in the list. According to this list updating process, a program that is viewed or played

back most recently can be indicated with highest priority, and no frequency counting is needed. This list updating process is effective where the user's tendency changes in a relatively short period of time.

5               In FIG. 11, a list updating process called Transport is employed. As also shown in FIG. 13, a newly registered program is put in a location of lowest priority in the list. When a program is updated, it is exchanged for an adjacent  
10              program of higher priority, and no frequency counting is needed. This list updating process is effective where the user's tendency does not change for a relatively long period of time.

                According to a list updating process shown in FIG. 12, a newly registered program is put in a location of lowest  
15              priority in the list, as also shown in FIG. 13. The list is updated depending on the frequency of programs that have been viewed or played back. This list updating process needs frequency counting, but can accurately reflect the preference of the user.

20              In this fashion, programs can be indicated both manually by the user and based on an automatic predicting process without the user's manual intervention. According to the user's manual program indicating process, programs can be indicated using days, times, and channels, or G codes or EPG  
25              (Electronic Program Guide) based on characters, etc.

                According to the automatic predicting process without the user's manual intervention, the list contains informa-

tion about the tendency of programs viewed in the past by the user and the tendency of programs recorded in the past by the secondary storage unit, and programs to be indicated for recording are automatically predicted from statistic data about the various parameters in the list. For example, five programs of highest priority are indicated for recording in the order of descending probability.

FIG. 14 shows in block form a broadcast video image recording apparatus according to another embodiment of the present invention. Those parts of the broadcast video image recording apparatus shown in FIG. 14 which are identical to those shown in FIG. 2 are denoted by identical reference numerals. The broadcast video image recording apparatus shown in FIG. 14 has three primary storage units 20, 21, 22 provided for respective channels for storing video image data broadcast in the channels. In the illustrated embodiment, therefore, the broadcast video image recording apparatus can simultaneously record video image data in a plurality of channels at the same time.

Similarly, if the single primary storage memory 2 shown in FIG. 1 capable of simultaneously storing video image data in a plurality of channels at the same time, then the broadcast video image recording apparatus shown in FIG. 1 can simultaneously record video image data in a plurality of channels at the same time. When video image data is to be deleted from the primary storage unit 2, oldest video image data is deleted from the primary storage unit 2.

If video image data in a plurality of channels have the same start time, then video image data of the oldest end time is deleted at first thereby to keep the latest video image data in the primary storage unit. According to another process, video image data of the latest end time is deleted, i.e., video image data of the longest recording time is deleted, at first thereby to keep an available storage capacity in the primary storage unit 2. According to still another process, older video image data may be deleted at first from the list, or alternatively, video image data of less importance may be deleted at first from the list.

Likewise, if video image data in a plurality of channels have the same start time, then video image data of the oldest end time, i.e., video image data of the shortest recording time, is recorded at first into the second storage unit. According to another process, video image data of the latest end time is recorded, i.e., video image data of the longest recording time is recorded, at first into the primary storage unit 2. According to still another process, newer video image data may be recorded at first into the secondary storage unit, or alternatively, video image data of greater importance may be recorded at first into the secondary storage unit.

While each of the primary and secondary storage units has been illustrated as comprising a magnetic disk unit or an optical disk unit in the above embodiments, it may be a digital video disk unit or a video tape unit.

In the above embodiments, video image data can be indicated for recording in the secondary storage unit both manually and automatically. However, the principles of the present invention are applicable to an apparatus which allows  
5 video image data to be indicated for recording in the secondary storage unit either manually or automatically, or which has a switch for selecting a manual or automatic indication of programs to be recorded.

The present invention offers the following advantages:  
10

(1) Broadcast video images are stored in a first storage unit at all times, and video images stored in the first storage unit are read and stored in a second storage unit at a time indicated for recording. Therefore, video images that have been broadcast in the past can be recorded.  
15

(2) Even if a recording time gets behind schedule, desired broadcast video images which have been stored in the first storage unit can be transferred from the first storage unit to the second storage unit at the delayed time. Therefore, the desired broadcast video images can be recorded in  
20 the second storage unit.

Although certain preferred embodiments of the present invention have been shown and described in detail, it should be understood that various changes and modifications may be made therein without departing from the scope of the  
25 appended claims.

What is claimed is:

1. A broadcast video image recording apparatus for recording broadcast video image data, comprising:

- 5           a first storage unit for storing broadcast video image data at all times; and
- a second storage unit for storing video image data to be played back; and
- a control unit for searching said first storage  
10 unit for video image data which has been indicated, and storing the indicated video image data in said second storage unit.

2. A broadcast video image recording apparatus according to claim 1, wherein said first storage unit stores the  
15 broadcast video image data according to an FIFO sequence.

3. A broadcast video image recording apparatus according to claim 1, wherein said first storage unit stores  
20 broadcast video image data in a plurality of channels.

4. A broadcast video image recording apparatus according to claim 1, further comprising:
- indicating means for indicating the video image  
25 data to be played back.



5. A broadcast video image recording apparatus according to claim 4, wherein said indicating means includes means for being operated by a user.

5           6. A broadcast video image recording apparatus according to claim 4, wherein said indicating means comprises means for determining the video image data to be played back from a list of information indicative of how video image data has been recorded by a user.

10           7. A broadcast video image recording apparatus according to claim 6, wherein said indicating means comprises means for determining video image data which is recorded with highest probability in said list, as the video image data to  
15 be played back.

          8. A broadcast video image recording apparatus according to claim 6, wherein said indicating means comprises means for placing video image data which has been recorded  
20 most recently in a location of highest priority in said list.

          9. A broadcast video image recording apparatus according to claim 6, wherein said indicating means comprises means for updating said list in order to impart higher priority  
25 ty to video image data which has been recorded most recently.

## ABSTRACT OF THE DISCLOSURE

A broadcast video image recording apparatus for recording broadcast video image data has a first storage unit for storing broadcast video image data, a second storage unit for storing video image data to be played back, and a control unit for searching the first storage unit for video image data which has been indicated, and storing the indicated video image data in the second storage unit. Broadcast video images are stored in the first storage unit at all times, and video images stored in the first storage unit are read and stored in the second storage unit at a time indicated for recording. Therefore, video images that have been broadcast in the past can be recorded.

FIG. 1

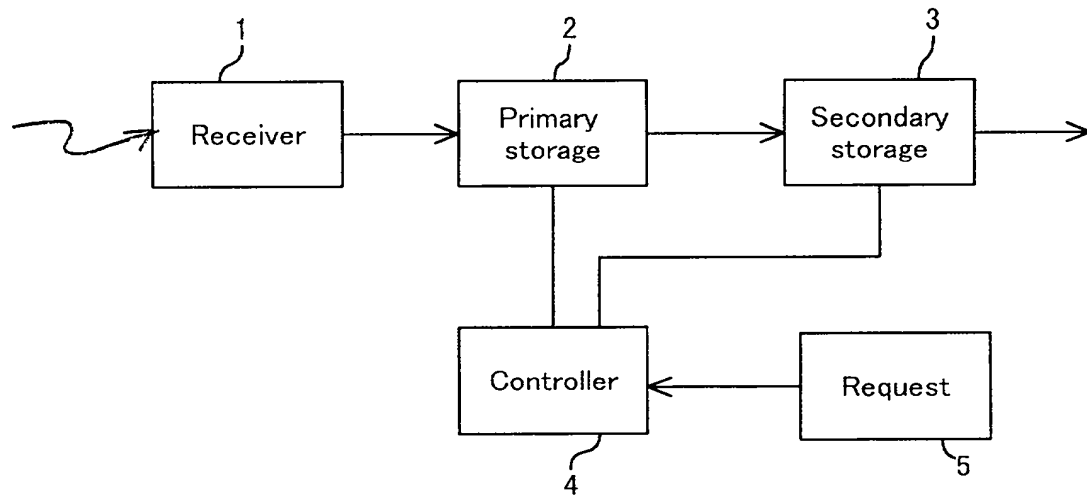


FIG. 2

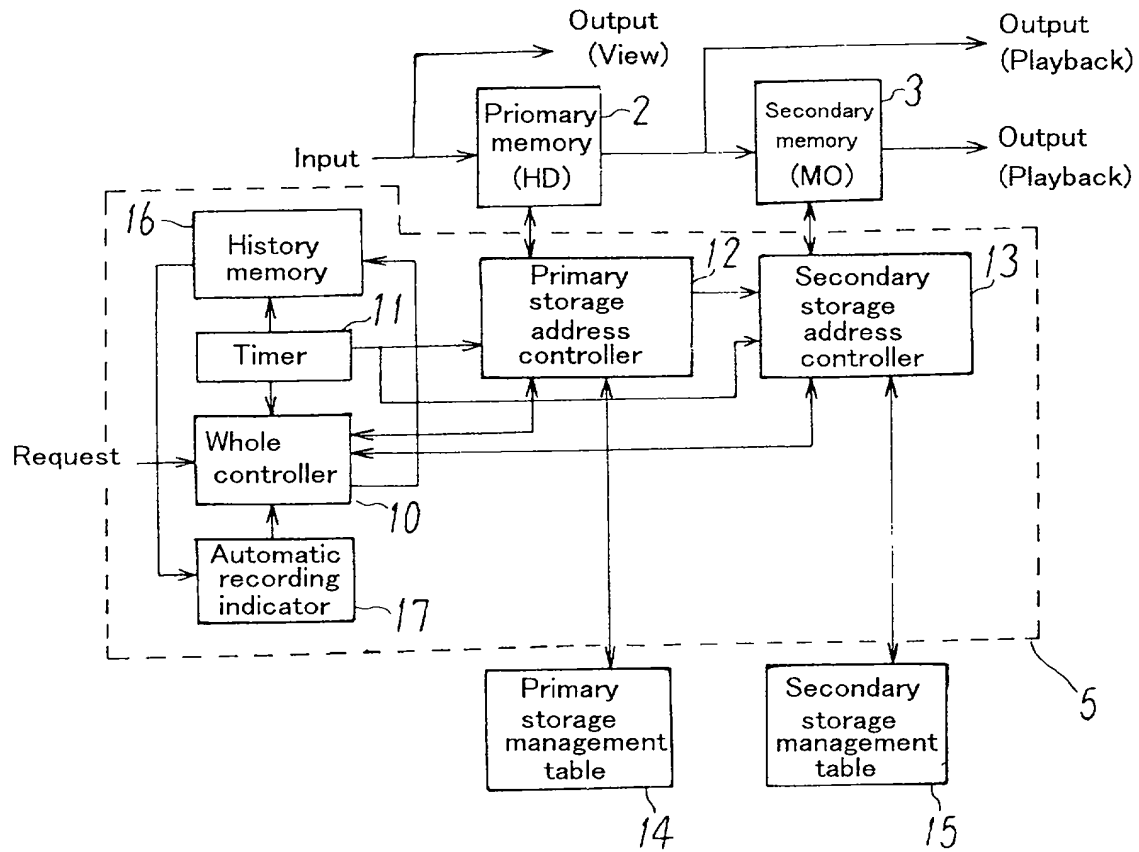


FIG. 3

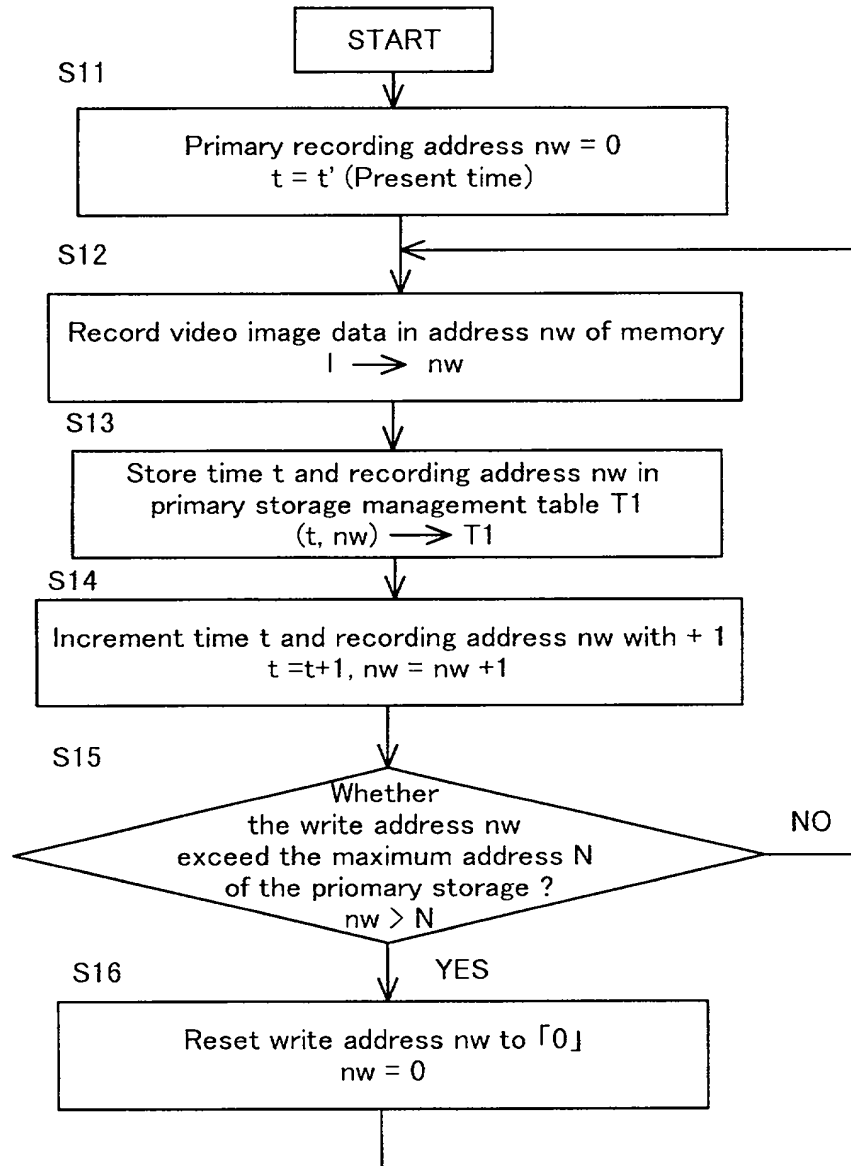


FIG. 4

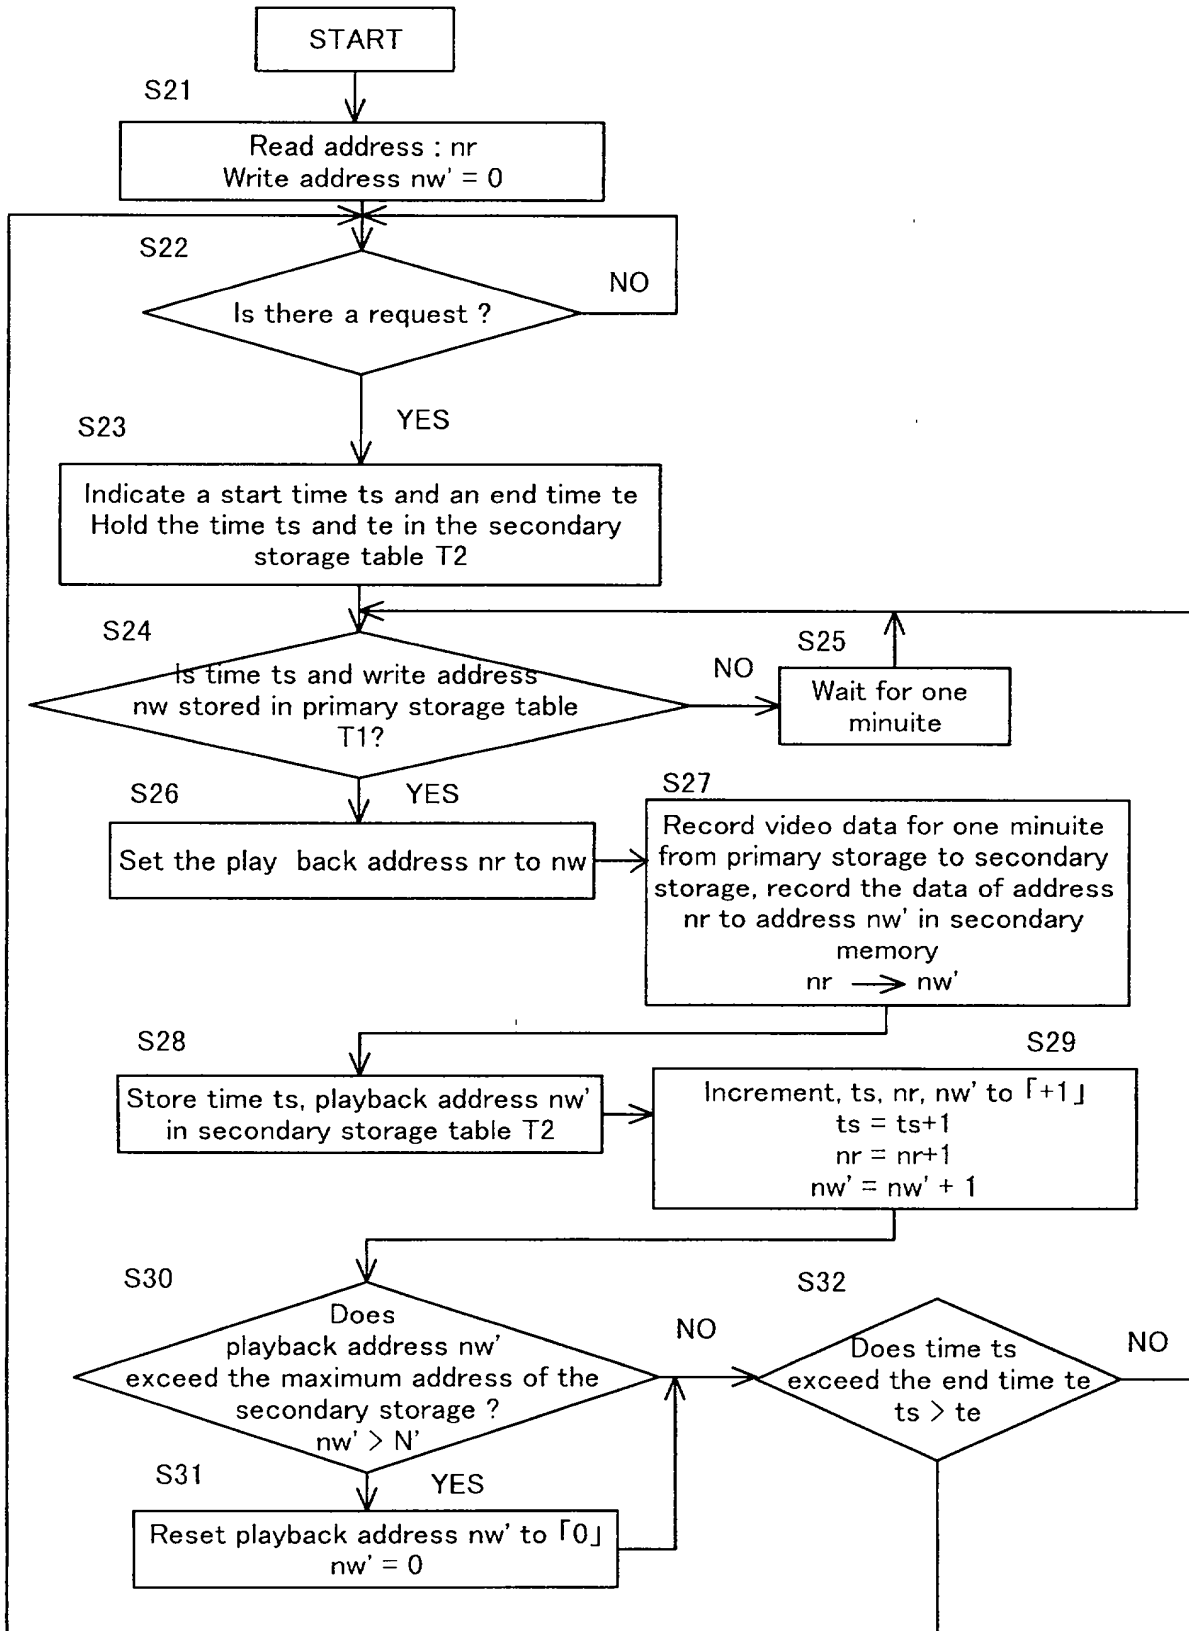


FIG. 5

Primary storage  
management table 14  
(Primary recording address)

TIME	PRIMARY RECORDING ADDRESS
9:00	0
9:01	1
9:02	2
...	...
9:14	14
9:15	15
7:16	16
...	...
8:59	119


Start of  
primary read →

End of  
primary  
read →

On primary  
write  
Present  
time : 9:16 →

Secondary storage  
management table 15  
(Secondary recording address)

TIME	SECONDARY RECORDING ADDRESS	IS RECORDED ?
9:01	0'	YES
9:02	1'	YES
9:03	2'	YES
...	...	...
9:14	13'	YES
	14	NO
	15	NO
...	...	...
	119'	NO



15-1

NAME OF RECORD	TIME	SECONDARY RECORDING ADDRESS
Record-1	14 minutes	0'-13'
...	...	...

FIG. 6

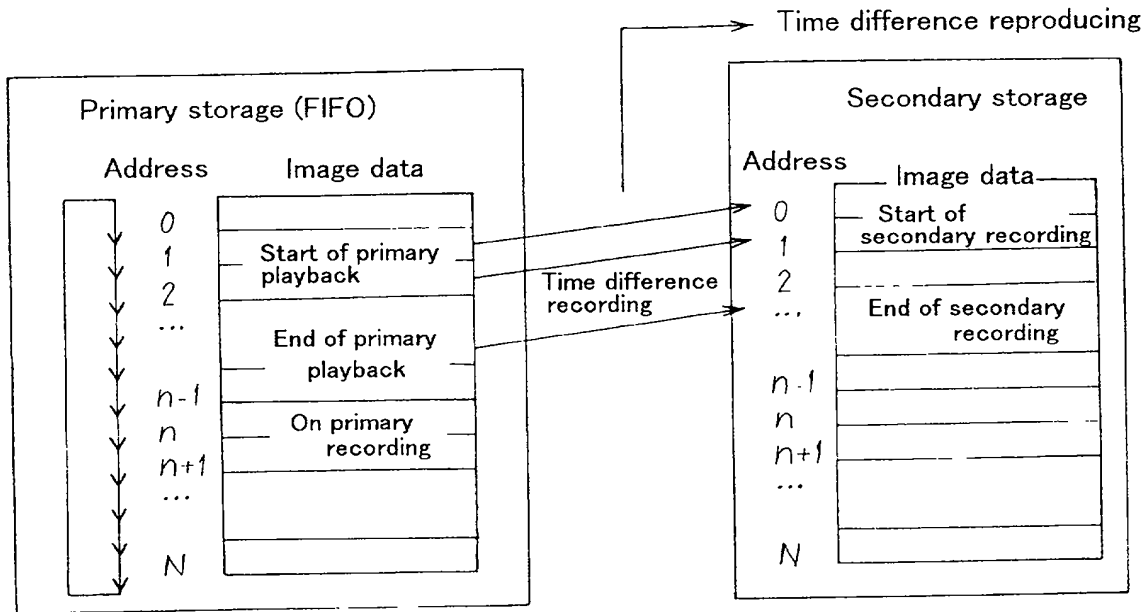




FIG. 7

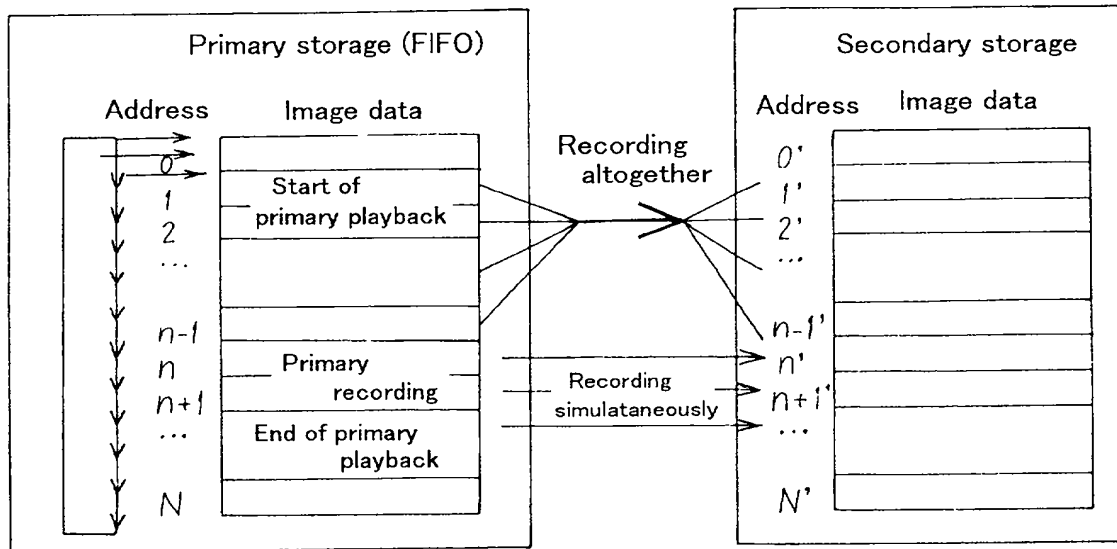


FIG. 8

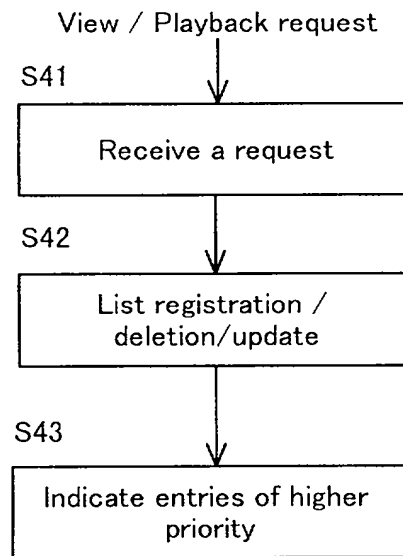


FIG. 9

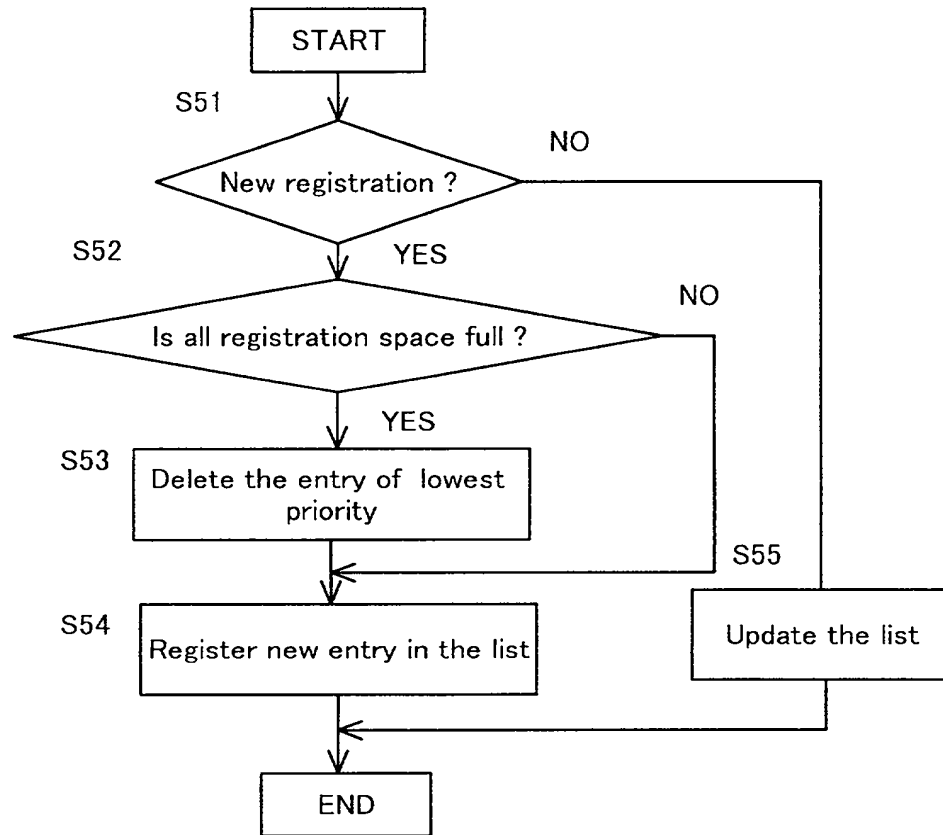


FIG. 10

VIEW / PLAYBACK LIST

Order	Day	CH	Start time	End time	Program title	Character name	Genre
1	SUN	6	8:30	10:00	\$\$\$	AAA	Information
2	SUN	8	18:30	19:00	!!!	BBB	Anime
3	MON	10	22:00	23:15	###	CCC	News
4	.	.	.	.	.	.	.
5	.	.	.	.	.	.	.
6	.	.	.	.	.	.	.

MTF

Registration again

New registration

FIG. 11

VIEW / PLAYBACK LIST

Order	Day	CH	Start time	End time	Program title	Character name	Genre
1	SUN	6	8:30	10:00	\$\$\$	AAA	Information
2	SUN	8	18:30	19:00	!!!	BBB	Anime
3	MON	10	22:00	23:15	###	CCC	News
4	.	.	.	.	.	.	.
5	.	.	.	.	.	.	.
6	.	.	.	.	.	.	.

Transport

Registration  
again

New  
registration

FIG. 12

VIEW / PLAYBACK LIST

Order	Day	CH	Start time	End time	Program title	Character name	Genre	Frequency
1	SUN	6	8:30	10:00	\$\$\$	AAA	Information	50
2	SUN	8	18:30	19:00	!!!	BBB	Anime	30
3	MON	10	22:00	23:15	###	CCC	News	10
4	.	.	.	.	.	.	.	5
5	.	.	.	.	.	.	.	3
6	.	.	.	.	.	.	.	1

← New registration

FIG. 13

METHOD	NEW REGISTRATION	UPDATE
MTF	Register in a location of highest priority	Move to the location of highest priority
TRANSPORT	Register in a location of lowest priority	Exchange for an adjacent program of higher priority
FREQUENCY ORDER	Register in a location of lowest priority	Count up frequency 「+1」 update depending on frequency comparison

FIG. 14


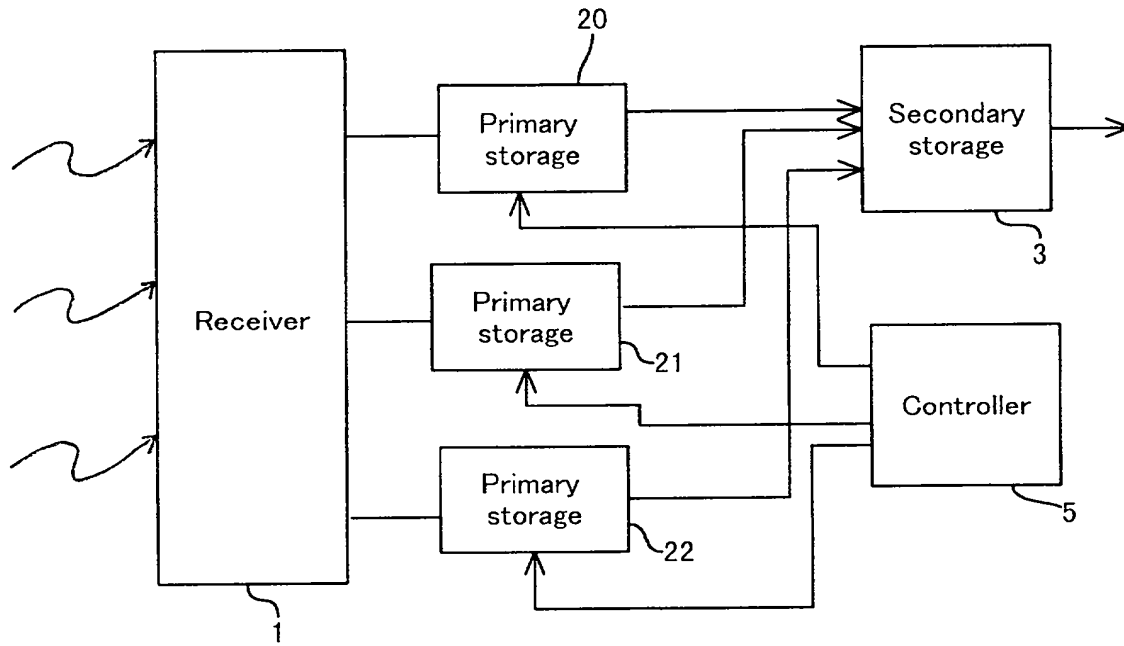




FIG. 15

PRIOR ART

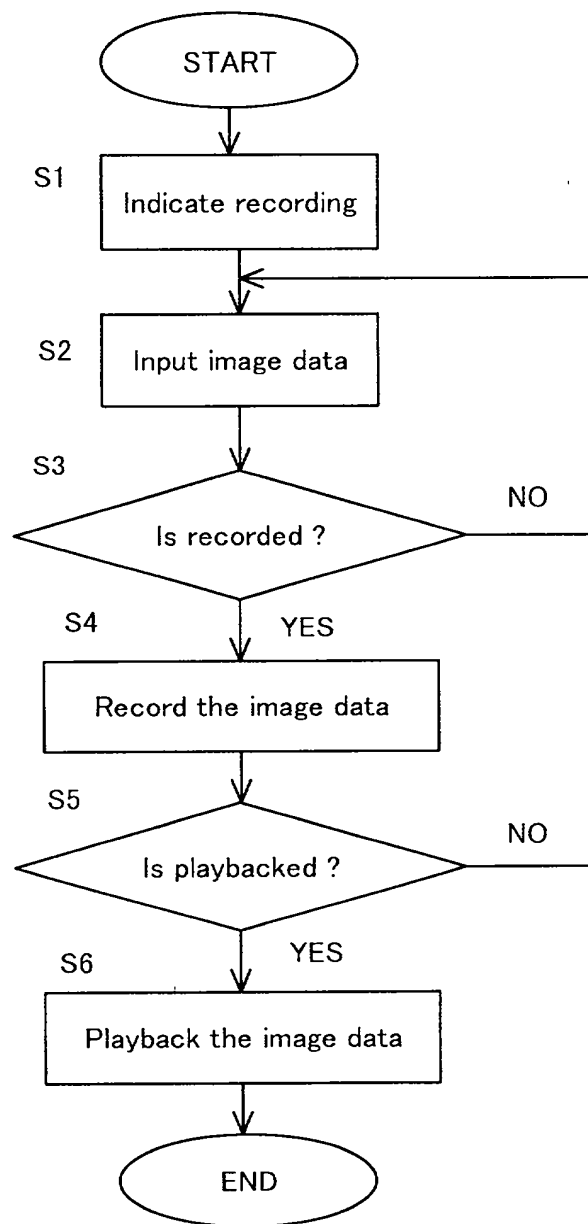

## Declaration and Power of Attorney For Patent Application

### 特許出願宣言書及び委任状

### Japanese Language Declaration

### 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、郵便箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

BROADCAST VIDEO IMAGE RECORDING

APPARATUS

上記発明の明細書（下記の欄でX印がついていない場合は、本表に添付）は、

the specification of which is attached hereto unless the following box is checked.

☐ 上記に添付され、米国特許番号または特許出願番号の国際公開番号を \_\_\_\_\_ とし、  
（該当する場合） \_\_\_\_\_ に訂正されました。

☒ was filed on \_\_\_\_\_  
as United States Application Number or  
PCT International Application Number  
\_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、発明者規則第37条第1条5項に定義されるとおり、特許出願が本件について当該な権利を関与する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一か国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している。本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

### Prior Foreign Application(s)

外国での先行出願  
10-31214

(Number)  
(番号)

Japan

(Country)  
(国名)

13/02/1998

(Day/Month/Year Filed)  
(出願年月日)

Priority Not Claimed  
優先権主張なし

(Number)  
(番号)

(Country)  
(国名)

(Day/Month/Year Filed)  
(出願年月日)

私は、第35編米国法典119条(e)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)項に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約第2条5項までの期間中に入予された、連邦規則法典第37編1条56項で定義された特許侵害の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう発明が真実であり、かつ私の入手した情報と私の信じることに基きく発明が全て真実であると述べていること、さらに仮定になされた虚偽の発明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような虚偽による虚偽の発明を行なえば、出願した、又は発明に許可された特許の効力が失われることを認識し、よってここに上記のごとく宣言を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

# Japanese Language Declaration

(日本語宣言書)

委任状 私は下記の発明者として、本出願に関する一切の  
手続を、特許庁長官に対して遂行する代理上または代理人  
として、下記の者を指名いたします。(弁護士、または代理  
人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint  
the following attorney(s) and/or agent(s) to prosecute this  
application and transact all business in the Patent and Trademark  
Office connected therewith (list name and registration number)

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers,  
30,358; William F. Herbert, 31,024; Richard A. Golhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D.  
Stein, 37,240; Paul I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Merlette, 35,269; Harlan B. Williams, Jr., 34,756;  
George N. Stevens, 36,938; Michael C. Soldner, P-41,455 and William M. Schertler, 35,348 (agent)

## 書翰送付先

H. J. Staas  
Staas & Halsey  
700 Eleventh Street, N.W. Suite 500  
Washington, DC 20001

## Send Correspondence to:

H. J. Staas  
Staas & Halsey  
700 Eleventh Street, N.W. Suite 500  
Washington, DC 20001

## 直接電話連絡先: (名前及び電話番号)

Telephone: 202-434-1500  
Facsimile: 202-434-1501

## Direct Telephone Calls to: (name and telephone number)

Telephone: 202-434-1500  
Facsimile: 202-434-1501

唯一または第一発明者名	Full name of sole or first inventor	
	Yoshiyuki OKADA	
発明者の署名	日付	Inventor's signature Date
		<i>Yoshiyuki Okada</i> 15/06/1998
住所	Residence	
	Nakahara-ku, Kawasaki-shi, Japan	
国籍	Citizenship	
	Japan	
郵便番号	Post Office Address	
	c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa, 211-8588 Japan	
第二共同発明者	Full name of second joint inventor, if any	
第二共同発明者	日付	Second inventor's signature Date
住所	Residence	
国籍	Citizenship	
郵便番号	Post Office Address	

(第三以降の共同発明者についても同様に記載し 署名をす  
ること)

(Supply similar information and signature for third and subsequent  
joint inventors)